




Malleable Rigid Set Screw Box Connector




- Connect Thread-less Rigid Conduit to boxes and enclosures
- Malleable Iron
- Concrete Tight
- Male Hub Thread (NPT)
- Zinc Finish

DIMENSIONS = INCHES

CAT. NO.	TRADE SIZE	DIMENSIONS			INNER BOX	OUTER BOX
		A	B	C		
I4340	1/2"	1.30	0.75	1.10	25	250
I4341	3/4"	1.40	0.91	1.33	25	250
I4342	1"	1.54	0.96	1.61	25	100
I4343	1-1/4"	1.97	1.30	1.95	5	50
I4344	1-1/2"	2.09	1.40	2.18	5	50
I4345	2"	2.32	1.57	2.67	-	20

Malleable Rigid Set Screw Couplings

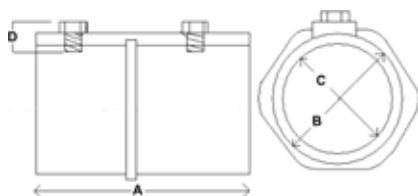


- Couple Sections of Thread-less Rigid Conduit together
- Malleable Iron
- Concrete Tight
- Zinc Finish

DIMENSIONS = INCHES

CAT. NO.	TRADE SIZE	DIMENSIONS				INNER BOX	OUTER BOX
		A	B	C	D		
I4350	1/2"	1.46	1.10	.86	.63	25	250
I4351	3/4"	1.40	1.33	1.05	.63	25	250
I4352	1"	1.93	1.61	1.36	.63	10	100
I4353	1-1/4"	1.97	1.95	1.69	.63	5	50
I4354	1-1/2"	2.09	2.18	1.90	.63	5	50
I4355	2"	2.32	2.67	2.40	.63	-	20
I4356	2-1/2"	3.73	3.45	2.92	.63	-	12
I4357	3"	4.10	3.95	3.52	.63	-	12
I4358	3-1/2"	4.52	4.45	4.10	.63	-	6
I4359	4"	5.62	5.01	4.52	.63	-	6

Rigid Short Radius Elbows



- For Connecting Rigid Conduit or IMC to an Outlet Box in Tight Radius Applications
- Zinc Die Cast

DIMENSIONS = INCHES

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4408	1/2"	.95	.95	25	250
I4409	3/4"	1.16	1.00	15	150