





Aluminum Rigid Conduit Bodies C Type-Threaded



To Provide Access to Conductors for Pulling, Splicing, and Maintenance. Threaded for Rigid & IMC Conduit


DIMENSIONS = INCHES

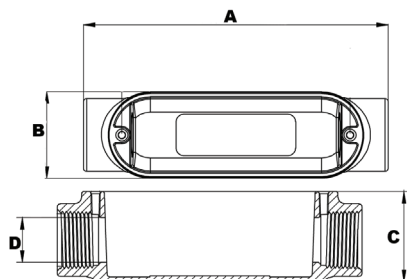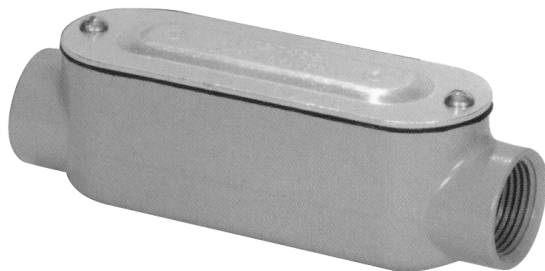

- Tapered Threaded Hubs (NPT)
- RainTight when used with Gasketed Covers
- Die-Cast from High-Strength, Corrosion and Weather Resistant, Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls

CAT. NO.	TRADE SIZE	DIMENSIONS-C SERIES				BOX QTY
		A	B	C	D	
I4I20	1/2"	4.72	1.34	1.36	.61	50
I4I21	3/4"	5.51	1.56	1.63	.81	50
I4I22	1"	6.46	1.82	1.89	1.04	25
I4I23	1-1/4"	8.35	2.51	2.50	1.37	10
I4I24	1-1/2"	8.35	2.51	2.50	1.60	10
I4I25	2"	10.55	3.19	3.41	2.06	10
I4I26	2-1/2"	13.46	4.49	3.98	2.46	1
I4I27	3"	13.46	4.49	4.53	3.06	1
I4I28	3-1/2"	16.30	5.55	5.59	3.54	1
I4I29	4"	16.30	5.55	5.59	4.02	1
WITH COVER AND GASKET						
I4I30	1/2"	4.72	1.34	1.36	.61	50
I4I31	3/4"	5.51	1.56	1.63	.81	50
I4I32	1"	6.46	1.82	1.89	1.04	10
I4I33	1-1/4"	8.35	2.51	2.50	1.37	10
I4I34	1-1/2"	8.35	2.51	2.50	1.60	10
I4I35	2"	10.55	3.19	3.41	2.06	10
I4I36	2-1/2"	13.46	4.49	3.98	2.46	1
I4I37	3"	13.46	4.49	4.53	3.06	1
I4I38	3-1/2"	16.30	5.55	5.59	3.54	1
I4I39	4"	16.30	5.55	5.59	4.02	1

Aluminum Mogul Conduit Bodies with Cover & Gasket

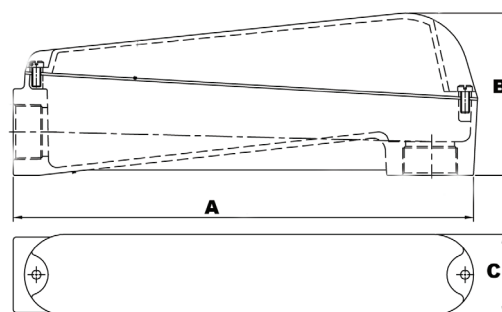

- Larger body size facilitates pulling of large and heavy conductors
- Specially designed raised cast covers provide additional wiring area
- Moguls are used for pulling straight, 45° or 90° angle turns and/or making taps and splices
- Smooth, rounded integral bushing in each hub protects conductor insulation
- Accurately tapped, tapered threads for tight, rigid joints and ground continuity
- Covers have captive stainless steel screws to speed installation, prevent 'freezing' of screws
- Includes cellulose/rubber Flex Sealing Gasket
- Length Requirement: distance between centerline of each hub bushing (conduit stop) exceeds six times the trade diameter of the conduit

DIMENSIONS = INCHES

CAT. NO.	TRADE SIZE	DIMENSIONS			WIRESIZE	BOX QTY
		A	B	C		
I4300	1-1/4"	9.65	3.54	2.50	3 #1/0 AWG	2
I4301	1-1/2"	14.53	5.41	3.13	3 #3/0 AWG	1
I4302	2"	14.53	5.41	3.13	3 #300 MCM	1
I4303	2-1/2"	22.01	7.54	4.53	3 #400 MCM	1
I4304	3"	22.01	7.54	4.53	3 #700 MCM	1
I4305	3-1/2"	28.84	8.94	5.51	3 #900 MCM	1
I4306	4"	28.84	8.94	5.51	3 #1000 MCM	1