


To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For Rigid, IMC & EMT Conduit

- Threaded for Rigid & IMC Conduits
- Set Screw for EMT Conduit
- RainTight when used with Gasketed Covers
- Die-Cast from High-Strength, Corrosion and Weather Resistant Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls

DIMENSIONS = INCHES

CAT. NO.	TRADE SIZE	DIMENSIONS-LR SERIES			BOX QTY
		A	B	C	
I4264	1/2"	4.31	2.03	1.36	50
I4265	3/4"	5.08	2.30	1.63	50
I4266	1"	5.92	2.68	1.89	25
I4267	1-1/4"	7.82	3.52	2.50	10
I4268	1-1/2"	7.82	3.52	2.50	10
I4269	2"	10.05	4.27	3.41	10
WITH COVER AND GASKET					
I4270	1/2"	4.31	2.03	1.36	50
I4271	3/4"	5.08	2.30	1.63	50
I4272	1"	5.92	2.68	1.89	25
I4273	1-1/4"	7.82	3.52	2.50	10
I4274	1-1/2"	7.82	3.52	2.50	10
I4275	2"	10.05	4.27	3.41	10

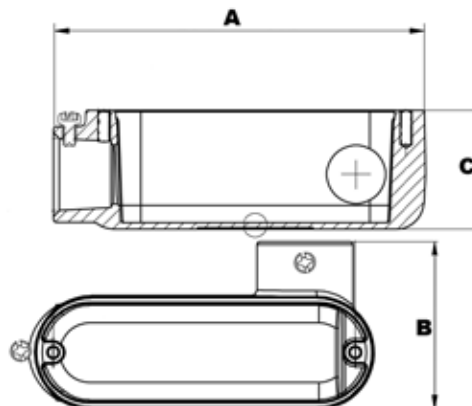

Aluminum Combination Conduit Bodies LL Type

To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For Rigid, IMC & EMT Conduit

- Threaded for Rigid & IMC Conduits
- Set Screw for EMT Conduit
- RainTight when used with Gasketed Covers
- Die-Cast from High-Strength, Corrosion and Weather Resistant Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls

DIMENSIONS = INCHES

CAT. NO.	TRADE SIZE	DIMENSIONS-LL SERIES			BOX QTY
		A	B	C	
I4276	1/2"	4.31	2.03	1.36	50
I4277	3/4"	5.08	2.30	1.63	50
I4278	1"	5.92	2.68	1.89	25
I4279	1-1/4"	7.82	3.52	2.50	10
I4280	1-1/2"	7.82	3.52	2.50	10
I4281	2"	10.05	4.27	3.41	10
WITH COVER AND GASKET					
I4282	1/2"	4.31	2.03	1.36	50
I4283	3/4"	5.08	2.30	1.63	50
I4284	1"	5.92	2.68	1.89	25
I4285	1-1/4"	7.82	3.52	2.50	10
I4286	1-1/2"	7.82	3.52	2.50	10
I4287	2"	10.05	4.27	3.41	10

