



Aluminum Combination Conduit Bodies C Type




To Provide Access to Conductors for Pulling, Splicing, and Maintenance. For Rigid, IMC & EMT Conduit



- Threaded for Rigid & IMC Conduits
- Set Screw for EMT Conduit
- RainTight when used with Gasketed Covers
- Die-Cast from High-Strength, Corrosion and Weather Resistant Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls

DIMENSIONS = INCHES

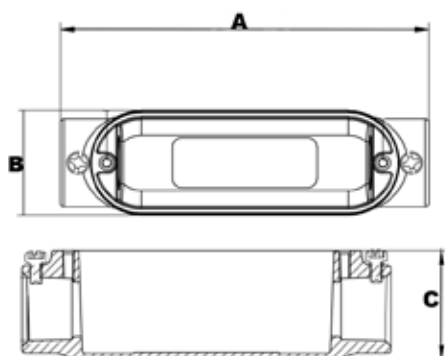

CAT. NO.	TRADE SIZE	DIMENSIONS-C SERIES			BOX QTY
		A	B	C	
I4288	1/2"	4.72	1.34	1.36	50
I4289	3/4"	5.51	1.56	1.63	50
I4290	1"	6.46	1.82	1.89	25
I4291	1-1/4"	8.35	2.51	2.50	10
I4292	1-1/2"	8.35	2.51	2.50	10
I4293	2"	10.55	3.19	3.41	10
WITH COVER AND GASKET					
I4294	1/2"	4.72	1.34	1.36	50
I4295	3/4"	5.51	1.56	1.63	50
I4296	1"	6.46	1.82	1.89	25
I4297	1-1/4"	8.35	2.51	2.50	10
I4298	1-1/2"	8.35	2.51	2.50	10
I4299	2"	10.55	3.19	3.41	10


Aluminum Service Entrance Condulets



- Tapered Threaded Hubs (NPT)
- Raintight with Gasketed covers
- Die Cast from High-Strength, Corrosion and Weather Resistant Copper Free Aluminum Alloy
- Flat Back Design for easy mounting close to walls

WITH GASKETED COVER

DIMENSIONS = INCHES

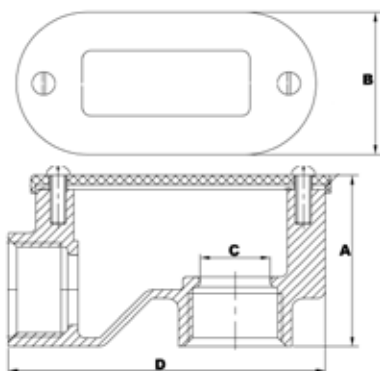

CAT. NO.	TRADE SIZE	DIMENSIONS				BOX QTY
		A	B	C	D	
I4307	1/2"	1.59	1.38	.59	3.15	300
I4308	3/4"	1.89	1.71	.78	3.58	50
I4310	1-1/4"	2.05	1.93	1.00	4.17	50
I4313*	1-1/4"	2.56	2.48	1.31	7.78	32
I4314*	2"	3.68	3.13	1.99	10.10	12

*Extra Long