


- Conduit locknuts for securing threaded conduit or connectors with tapered or straight thread, to a knockout or unthreaded slip hole

DIMENSIONS = INCHES

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4730	1/2"	1.13	0.11	100	1,000
I4731	3/4"	1.39	0.12	100	1,000
I4732	1"	1.71	0.15	50	500
I4733	1-1/4"	2.06	0.15	25	500
I4734	1-1/2"	2.36	0.15	25	200
I4735	2"	2.86	0.16	25	200
I4736	2-1/2"	3.43	0.20	25	100
I4737	3"	4.11	0.20	25	100
I4738	3-1/2"	4.69	0.21	25	100
I4739	4"	5.26	0.22	25	100
I4740	5"	6.50	0.43	-	20
I4741	6"	7.80	0.43	-	20

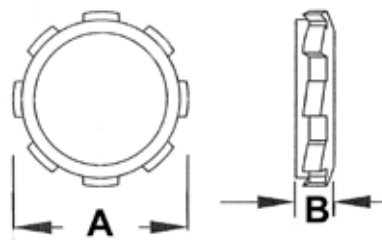


Sealing Locknuts - Steel

- Sealing locknuts provide a rain tight seal when securing threaded conduit or connectors with tapered or straight thread, to a knockout or unthreaded slip hole of a box or enclosure
- Integral Gasket

DIMENSIONS = INCHES


CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4754	1/2"	1.13	.21	100	1,000
I4755	3/4"	1.39	.22	100	1,000
I4756	1"	1.71	.31	100	1,000
I4757	1-1/4"	2.07	.29	50	500
I4758	1-1/2"	2.36	.29	50	500
I4759	2"	2.88	.29	25	250



- Used with bushings to bond threaded rigid conduit and IMC to boxes, cabinets, or other enclosures where locknut is exposed

DIMENSIONS = INCHES

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4742	1/2"	1.14	.17	100	1,000
I4743	3/4"	1.39	.18	100	1,000
I4744	1"	1.73	.24	50	500
I4745	1-1/4"	2.08	.24	25	200
I4746	1-1/2"	2.40	.25	25	200
I4747	2"	2.91	.29	25	100
I4748	2-1/2"	3.46	.29	25	100
I4749	3"	4.14	.30	25	100
I4750	3-1/2"	4.69	.30	25	100
I4751	4"	5.25	.34	25	100



Grounding Locknuts - Steel

UL LISTED