




Rigid Water Tight Hubs - Zinc Die Cast




- To secure threaded rigid service entrance conduit & IMC to box or enclosure
- Assembled with 105°C rated flame retardant Lexan throat insulator and BUNA-N sealing ring that completely encircles knockout to prevent contaminants from entering enclosure
- UL Listed and CSA Certified for use in wet locations

DIMENSIONS = INCHES

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4800	1/2"	1.41	1.41	-	150
I4801	3/4"	1.54	1.66	-	120
I4802	1"	1.75	1.95	-	50
I4803	1-1/4"	1.69	2.41	-	40
I4804	1-1/2"	1.71	2.69	-	30
I4805	2"	1.83	3.20	-	30
I4806	2-1/2"	2.59	3.69	-	10
I4807	3"	2.61	4.39	-	6
I4808	3-1/2"	2.53	4.72	-	6
I4809	4"	2.56	5.47	-	6

Rigid Water Tight Hubs with Bonding Screw - Zinc

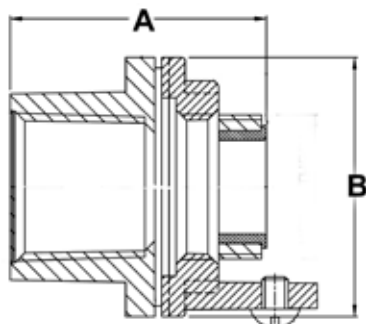

- Male thread type
- Tapered female thread for Rigid conduit and IMC
- Recessed O-ring seal assures watertight connections
- Insulated throat and bonding locknut is suitable for service entrance application
- Assembled with 105°C rated flame retardant Lexan throat insulator and BUNA-N sealing ring
- UL Listed and CSA Certified for use in wet locations

DIMENSIONS = INCHES

CAT. NO.	TRADE SIZE	DIMENSIONS		INNER BOX	OUTER BOX
		A	B		
I4810	1/2"	1.42	1.22	25	250
I4811	3/4"	1.61	1.50	25	150
I4812	1"	1.87	1.89	25	100
I4813	1-1/4"	2.01	2.24	10	60
I4814	1-1/2"	2.12	2.52	10	60
I4815	2"	2.20	3.03	10	40
I4816	2-1/2"	2.64	3.54	-	12
I4817	3"	2.64	4.07	-	12
I4818	3-1/2"	2.70	4.78	-	6
I4819	4"	2.70	5.35	-	6