



Aluminum Ground Pipe Clamps

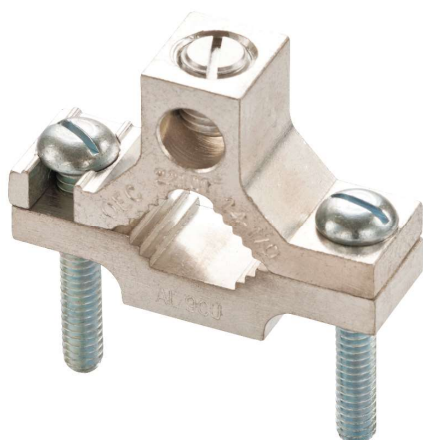


FIG 1



FIG 2

- Cast of High Conductivity 6061-T6 Tin Plated Aluminum Alloy
- Dual Rated for Copper or Aluminum Conductors
- For Connecting Copper or Aluminum Conductor to Water Pipe, Ground Rod, Copper Water Pipe, Galvanized Pipe or Steel Conduit
- Tin Plated Aluminum Set Screw for Corrosion Resistance
- Tin Plated Machined Steel Mounting Hardware
- 90635, 90537 & 90540 have Lay-In Feature for use in Continuous Loop applications

DIMENSIONS = INCHES

CAT. NO.	FIG	TYPE	PIPE RANGE	WIRE RANGE		SCREW SIZE		BOX QTY
				MIN	MAX	TOP	SIDE	
90633	1	FEED-THRU	1/2"-1"	14	1/0	7/16 X .55"	1/4-20 X 1.50"	25
90632	1	FEED-THRU	1-1/4"-2"	6	250	5/8-18 X 1.18"	5/16-18 X 2.17"	5
90561	1	FEED-THRU	2-1/2"-4"	6	250	5/8-18 X 1.18"	5/16-18 X 2.17"	5
90635	2	LAY-IN	1/2"-1"	14	1/0	7/16 X .55"	1/4-20 X 1.50"	25
90640	2	LAY-IN	1-1/4"-2"	6	250	5/8-18 X 1.18"	5/16-18 X 2.17"	5
90637	2	LAY-IN	2-1/2"-4"	6	250	5/8-18 X 1.18"	5/16-18 X 2.17"	5

Zinc Ground Pipe Clamps



FIG 1



FIG 2

- Cast of High Conductivity Zinc Alloy
- Dual Rated for Copper or Aluminum Conductors
- For Connecting Copper or Aluminum Conductor to Water Pipe, Ground Rod, Copper Water Pipe, Galvanized Pipe or Steel Conduit
- Tin Plated Aluminum Set Screw for Corrosion Resistance
- Tin Plated Machined Steel Mounting Hardware

DIMENSIONS = INCHES

CAT. NO.	FIG	TYPE	CABLE TYPE	PIPE RANGE	WIRE RANGE		SCREW SIZE		BOX QTY
					MIN	MAX	TOP	SIDE	
90567	1	FEED-THRU	JACKETED	1/2"-1"	10	2	1/4 X .51"	1/4-20 X 1.50"	100
90570	2	FEED-THRU	ARMORED	1/2"-1"	8	6	1/4 X .62"	1/4-20 X 1.50"	100