




Nylon Insulated Flange Spade Terminals

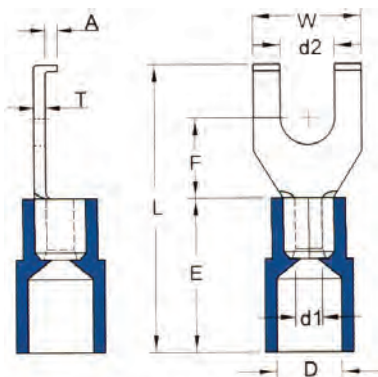

MAXIMUM ELECTRIC CURRENT:

AWG	22	20	18	16	14	12	10
AMP	9	12	17	18	30	35	50

MAXIMUM ELECTRIC RATING: 221°F (105°C) 600 Volts

INSULATION MATERIAL: Nylon


TERMINAL MATERIAL: Electro-Tin Plated Copper - Brazed Seam

FEATURES: Serrated Barrel, Expanded Insulation

DIMENSIONS = INCHES

CAT. NO.	COLOR	WIRE SIZE AWG	STUD SIZE	D2	W	F	L	E	D	DI	A	T	BAG QTY	MASTER BAG QTY
11802	RED	22-16	#4	.126	.252	.201	.787	.443	.157	.067	.059	.030	100	1,000
11804	RED	22-16	#6	.146	.252	.201	.787	.443	.157	.067	.059	.030	100	1,000
11806	RED	22-16	#8	.169	.335	.283	1.004	.443	.157	.067	.059	.030	100	1,000
11808	RED	22-16	#10	.209	.295	.201	.787	.443	.157	.067	.059	.030	100	1,000
11810	BLUE	16-14	#6	.146	.295	.205	.807	.443	.177	.091	.059	.031	100	1,000
11812	BLUE	16-14	#8	.169	.315	.266	.965	.443	.177	.091	.059	.031	100	1,000
11814	BLUE	16-14	#10	.209	.335	.283	.945	.443	.177	.091	.059	.031	100	1,000
11816	YELLOW	12-10	#6	.146	.299	.244	1.004	.512	.252	.134	.059	.039	100	1,000
11818	YELLOW	12-10	#8	.169	.335	.295	1.063	.512	.252	.134	.059	.039	100	1,000
11820	YELLOW	12-10	#10	.209	.299	.244	1.004	.512	.252	.134	.059	.039	100	1,000

Non-Insulated Pin Terminals

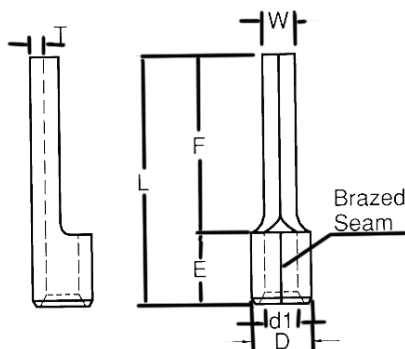

MAXIMUM ELECTRIC CURRENT:

AWG	22	20	18	16	14	12	10
AMP	9	12	17	18	30	35	50

MAXIMUM ELECTRIC RATING: 302°F (150°C) 600 Volts

TERMINAL MATERIAL: Electro-Tin Plated Copper

FEATURES: Brazed Seam, Serrated Barrel

DIMENSIONS = INCHES

CAT. NO.	WIRE SIZE AWG	W	F	L	E	D	DI	T	BAG QTY	MASTER BAG QTY
11822	22-16	.075	.472	.661	.189	.134	.067	.030	100	1,000
11824	16-14	.075	.472	.661	.189	.161	.091	.031	100	1,000
11826	12-10	.110	.551	.787	.236	.220	.134	.039	100	1,000