

Nylon Insulated Pin Terminals



MAXIMUM ELECTRIC CURRENT:


AWG	22	20	18	16	14	12	10
AMP	9	12	17	18	30	35	50

MAXIMUM ELECTRIC RATING: 221°F (105°C) 600 Volts

INSULATION MATERIAL: Nylon

TERMINAL MATERIAL: Electro-Tin Plated Copper - Brazed Seam

FEATURES: Serrated Barrel, Expanded Insulation

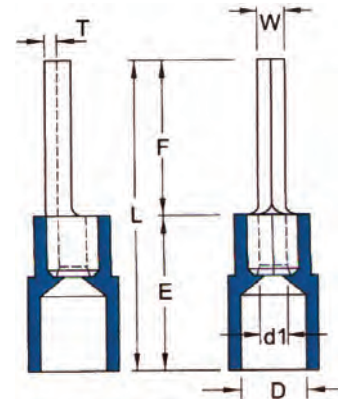

DIMENSIONS = INCHES

CAT. NO.	COLOR	WIRE SIZE AWG	W	F	L	E	D	DI	T	BAG QTY	MASTER BAG QTY
11832	RED	22-16	.075	.472	.898	.433	.157	.067	.030	100	1,000
11834	BLUE	16-14	.075	.472	.898	.433	.177	.091	.031	100	1,000
11836	YELLOW	12-10	.110	.551	1.063	.512	.252	.134	.039	100	1,000

Nylon Insulated Blade Terminals



MAXIMUM ELECTRIC CURRENT:


AWG	26	24	22	18	16	14	12	10
AMP	5.5	7	9	17	18	30	35	50

MAXIMUM ELECTRIC RATING: 221°F (105°C) 600 Volts

INSULATION MATERIAL: Nylon

TERMINAL MATERIAL: Electro-Tin Plated Copper - Brazed Seam

FEATURES: Serrated Barrel, Expanded Insulation

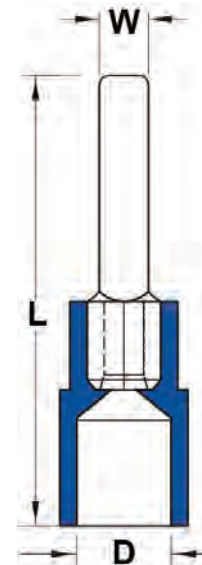

DIMENSIONS = INCHES

CAT. NO.	COLOR	WIRE SIZE AWG	TAB DIM.	L	D	W	BAG QTY	MASTER BAG QTY
11842	RED	22-16	.118 X .030	.858	.157	.118	100	1,000
11844	BLUE	16-14	.118 X .031	.937	.177	.118	100	1,000
11846	YELLOW	12-10	.110 X .039	.906	.252	.110	100	1,000