


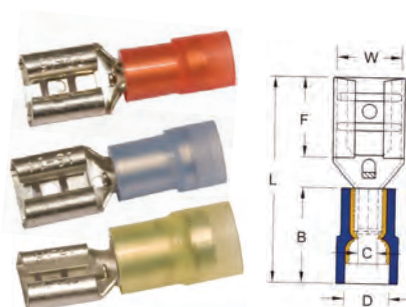

Nylon Insulated Double Crimp Female Disconnects

NEW
BULK PACKS


MAXIMUM ELECTRIC CURRENT:

AWG	22	20	18	16	14	12	10
AMP	3	4	7	10	15	20	24

MAXIMUM ELECTRIC RATING: 221°F (105°C) 600 Volts

INSULATION MATERIAL: Nylon

TERMINAL MATERIAL: Electro-Tin Plated Brass


DOUBLE CRIMP: Extended Copper Sleeve for Multiple Crimps

FEATURES: Serrated Barrel, Expanded Insulation

DIMENSIONS = INCHES

CAT. NO.	COLOR	WIRE SIZE AWG	NEMA TAB	W	F	L	B	C	D	T	BAG QTY	MASTER BAG QTY
I1902	RED	22-16	.020 X.110	.126	.256	.772	.433	.067	.157	.012	100	1,000
I1904	RED	22-16	.032 X.110	.126	.256	.772	.433	.067	.157	.012	100	1,000
I1906	RED	22-16	.020 X.187	.197	.252	.787	.433	.067	.157	.014	100	1,000
I1908	RED	22-16	.032 X.187	.197	.252	.787	.433	.067	.157	.014	100	1,000
I1910	RED	22-16	.020 X.205	.224	.260	.768	.433	.067	.157	.014	100	1,000
I1912	RED	22-16	.032 X.250	.260	.287	.846	.433	.067	.157	.016	100	1,000
I1912B	RED	22-16	.032 X.250	.260	.287	.846	.433	.067	.157	.016	1,000	10,000
I1914	BLUE	16-14	.020 X.110	.126	.256	.772	.433	.091	.197	.012	100	1,000
I1916	BLUE	16-14	.032 X.110	.126	.256	.772	.433	.091	.197	.012	100	1,000
I1918	BLUE	16-14	.020 X.187	.197	.252	.787	.433	.091	.197	.014	100	1,000
I1920	BLUE	16-14	.032 X.187	.197	.252	.787	.433	.091	.197	.014	100	1,000
I1922	BLUE	16-14	.020 X.205	.224	.228	.768	.433	.091	.197	.014	100	1,000
I1924	BLUE	16-14	.032 X.250	.260	.295	.846	.433	.091	.197	.016	100	1,000
I1924B	BLUE	16-14	.032 X.250	.260	.295	.846	.433	.091	.197	.016	1,000	10,000
I1926	YELLOW	12-10	.020 X.110	.126	.256	.866	.512	.134	.256	.014	100	1,000
I1928	YELLOW	12-10	.032 X.110	.126	.256	.866	.512	.134	.256	.014	100	1,000
I1930	YELLOW	12-10	.020 X.187	.197	.256	.866	.512	.134	.256	.014	100	1,000
I1932	YELLOW	12-10	.032 X.187	.197	.256	.866	.512	.134	.256	.014	100	1,000
I1934	YELLOW	12-10	.032 X.250	.260	.295	.925	.512	.134	.256	.016	100	1,000
I1934B	YELLOW	12-10	.032 X.250	.260	.295	.925	.512	.134	.256	.016	500	10,000

Nylon Insulated Double Crimp Male Disconnects

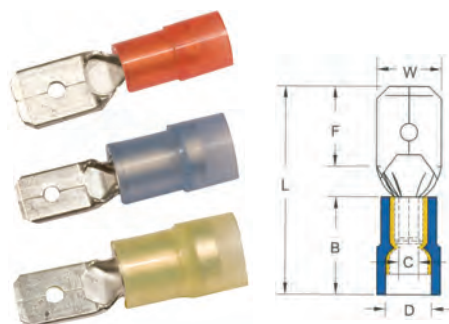

MAXIMUM ELECTRIC CURRENT:

AWG	22	20	18	16	14	12	10
AMP	3	4	7	10	15	20	24

MAXIMUM ELECTRIC RATING: 221°F (105°C) 600 Volts

INSULATION MATERIAL: Nylon

TERMINAL MATERIAL: Electro-Tin Plated Brass

DOUBLE CRIMP: Extended Copper Sleeve for Multiple Crimps

FEATURES: Serrated Barrel, Expanded Insulation

DIMENSIONS = INCHES

CAT. NO.	COLOR	WIRE SIZE AWG	NEMA TAB	W	F	L	B	C	D	T	BAG QTY	MASTER BAG QTY
I1942	RED	22-16	.020 X.110	.110	.256	.768	.433	.067	.157	.020	100	1,000
I1944	RED	22-16	.032 X.110	.110	.256	.768	.433	.067	.157	.016	100	1,000
I1946	RED	22-16	.020 X.187	.189	.256	.768	.433	.067	.157	.020	100	1,000
I1948	RED	22-16	.032 X.187	.189	.264	.768	.433	.067	.157	.016	100	1,000
I1950	RED	22-16	.032 X.250	.250	.303	.866	.433	.067	.157	.016	100	1,000
I1952	BLUE	16-14	.020 X.187	.189	.256	.787	.433	.091	.197	.020	100	1,000
I1954	BLUE	16-14	.032 X.187	.189	.264	.787	.433	.091	.197	.020	100	1,000
I1956	BLUE	16-14	.032 X.250	.250	.303	.874	.433	.091	.197	.016	100	1,000
I1958	YELLOW	12-10	.032 X.250	.250	.303	.945	.512	.134	.256	.016	100	1,000