


Non-Insulated Flag Female Disconnects

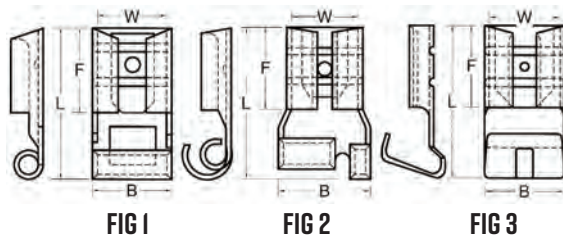

MAXIMUM ELECTRIC CURRENT:

AWG	22	20	18	16	14	12	10
AMP	3	4	7	10	15	20	24

MAXIMUM ELECTRIC RATING: 221°F (150°C) 600V


TERMINAL MATERIAL: Electro-Tin Plated Brass

DIMENSIONS = INCHES

CAT. NO.	WIRE SIZE AWG	NEMA TAB	W	F	L	B	T	FIG	BAG QTY	MASTER BAG QTY
I2412	22-16	.020 X.187	.197	.244	.445	.217	.016	1	100	1,000
I2414	22-16	.032 X.187	.197	.244	.445	.217	.016	1	100	1,000
I2416	22-16	.032 X.250	.260	.299	.551	.291	.016	1	100	1,000
I2418	22-16	.032 X.250	.260	.307	.591	.366	.018	2	100	1,000
I2420	16-14	.020 X.187	.197	.244	.457	.217	.016	1	100	1,000
I2422	16-14	.032 X.187	.197	.244	.457	.217	.016	1	100	1,000
I2424	16-14	.032 X.250	.260	.299	.551	.291	.016	1	100	1,000
I2426	16-14	.032 X.250	.260	.307	.591	.366	.018	2	100	1,000
I2428	12-10	.032 X.250	.260	.299	.571	.295	.018	3	100	1,000

Nylon Insulated Flag Female Disconnects

NEW
BULK PACKS

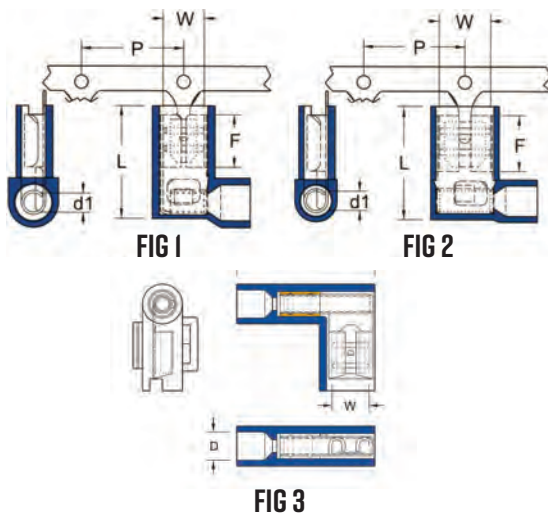

MAXIMUM ELECTRIC CURRENT:

AWG	22	20	18	16	14
AMP	3	4	7	10	15

MAXIMUM ELECTRIC RATING: 221°F (105°C) 600 Volts

INSULATION MATERIAL: Nylon

TERMINAL MATERIAL: Electro-Tin Plated Brass

FEATURES: Serrated Barrel, Expanded Insulation

DIMENSIONS = INCHES

CAT. NO.	COLOR	WIRE SIZE AWG	NEMA TAB	W	F	L	DI	D	FIG.	BAG QTY	MASTER BAG QTY
I2432	RED	22-16	.020 X.187	.197	.276	.591	.063	-	1	100	1,000
I2434	RED	22-16	.032 X.187	.197	.276	.591	.063	-	1	100	1,000
I2436	RED	22-16	.032 X.250	.260	.299	.598	.063	-	1	100	10,00
I2436B	RED	22-16	.032 X.250	.260	.299	.598	.063	-	1	1,000	10,000
I2438	BLUE	16-14	.020 X.187	.197	.276	.598	.083	-	2	100	1,000
I2440	BLUE	16-14	.032 X.187	.197	.276	.598	.083	-	2	100	1,000
I2442	BLUE	16-14	.032 X.250	.260	.299	.598	.083	-	2	100	1,000
I2442B	BLUE	16-14	.032 X.250	.260	.299	.598	.083	-	2	1,000	10,000
I2443	YELLOW	12-10	.032 X.250	.260	.295	.906	.083	.248	3	100	1,000
I2443B	YELLOW	12-10	.032 X.250	.260	.295	.906	.083	-	3	500	5,000