




Heat Shrinkable - Female Disconnects

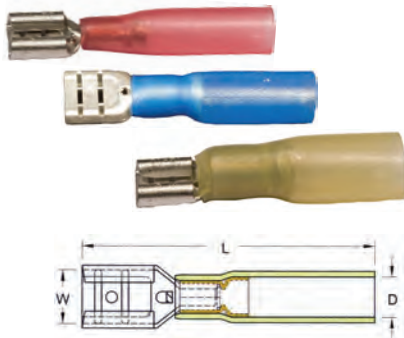

MAXIMUM ELECTRIC CURRENT:

| | | | | | | | |
|-----|----|----|----|----|----|----|----|
| AWG | 22 | 20 | 18 | 16 | 14 | 12 | 10 |
| AMP | 3 | 4 | 7 | 10 | 15 | 20 | 24 |

MAXIMUM ELECTRIC RATING: 300 Volts

SHRINK TEMP: 302°F (150°C)

RESISTANT TEMP: 14°F ~ 221°F (-26°C ~ 105°C)

INSULATION MATERIAL: High Density PE Heat Shrink

DOUBLE CRIMP: Extended Copper Sleeve


TERMINAL MATERIAL: Electro-Tin Plated Brass

FEATURES: Serrated Barrel

DIMENSIONS = INCHES

| CAT. NO. | COLOR | WIRE SIZE AWG | NEMA TAB | W | D | L | BAG QTY | MASTER BAG QTY |
|----------|--------|---------------|------------|------|------|-------|---------|----------------|
| I2272 | RED | 22-16 | .032 X.250 | .260 | .217 | 1.339 | 100 | 1,000 |
| I2274 | BLUE | 16-14 | .032 X.250 | .260 | .236 | 1.339 | 100 | 1,000 |
| I2276 | YELLOW | 12-10 | .032 X.250 | .260 | .319 | 1.378 | 100 | 1,000 |

Heat Shrinkable - Fully Insulated Female Disconnects

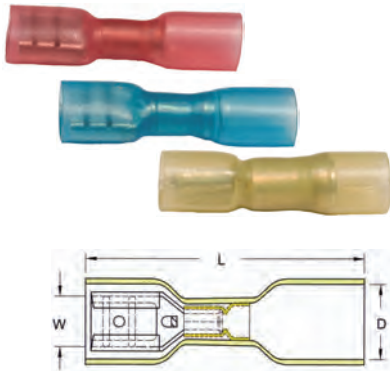

MAXIMUM ELECTRIC CURRENT:

| | | | | | | | |
|-----|----|----|----|----|----|----|----|
| AWG | 22 | 20 | 18 | 16 | 14 | 12 | 10 |
| AMP | 3 | 4 | 7 | 10 | 15 | 20 | 24 |

MAXIMUM ELECTRIC RATING: 300 Volts

SHRINK TEMP: 302°F (150°C)

RESISTANT TEMP: 14°F ~ 221°F (-26°C ~ 105°C)

INSULATION MATERIAL: High Density PE Heat Shrink

DOUBLE CRIMP: Extended Copper Sleeve


TERMINAL MATERIAL: Electro-Tin Plated Brass

FEATURES: Serrated Barrel

DIMENSIONS = INCHES

| CAT. NO. | COLOR | WIRE SIZE AWG | NEMA TAB | W | D | L | BAG QTY | BOX QTY |
|----------|--------|---------------|------------|------|------|-------|---------|---------|
| I2282 | RED | 22-16 | .032 X.250 | .260 | .256 | 1.102 | 100 | 1,000 |
| I2284 | BLUE | 16-14 | .032 X.250 | .260 | .256 | 1.102 | 100 | 1,000 |
| I2286 | YELLOW | 12-10 | .032 X.250 | .260 | .295 | 1.102 | 100 | 1,000 |

Heat Shrinkable - Male Disconnects

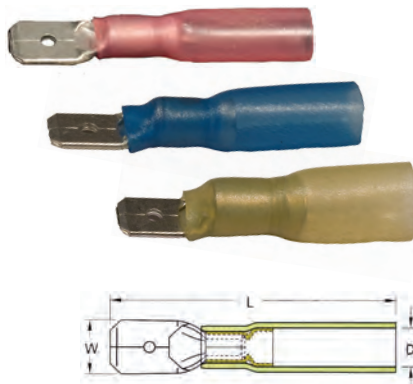

MAXIMUM ELECTRIC CURRENT:

| | | | | | | | |
|-----|----|----|----|----|----|----|----|
| AWG | 22 | 20 | 18 | 16 | 14 | 12 | 10 |
| AMP | 3 | 4 | 7 | 10 | 15 | 20 | 24 |

MAXIMUM ELECTRIC RATING: 300 Volts

SHRINK TEMP: 302°F (150°C)

RESISTANT TEMP: 14°F ~ 221°F (-26°C ~ 105°C)

INSULATION MATERIAL: High Density PE Heat Shrink

DOUBLE CRIMP: Extended Copper Sleeve

TERMINAL MATERIAL: Electro-Tin Plated Brass

FEATURES: Serrated Barrel

DIMENSIONS = INCHES

| CAT. NO. | COLOR | WIRE SIZE AWG | NEMA TAB | W | D | L | BAG QTY | MASTER BAG QTY |
|----------|--------|---------------|------------|------|------|-------|---------|----------------|
| I2292 | RED | 22-16 | .032 X.250 | .250 | .217 | 1.339 | 100 | 1,000 |
| I2294 | BLUE | 16-14 | .032 X.250 | .250 | .236 | 1.339 | 100 | 1,000 |
| I2296 | YELLOW | 12-10 | .032 X.250 | .250 | .319 | 1.378 | 100 | 1,000 |