




Heat Shrinkable - Nylon Reducing Butt Splice Connector



MAXIMUM ELECTRIC CURRENT:

AWG	22	20	18	16	14	12	10
AMP	9	12	17	18	30	35	50

MAXIMUM ELECTRIC RATING: 600 Volts

SHRINK TEMP: 302°F (150°C)


INSULATION MATERIAL: Nylon w/ High Density PE Heat Shrink

TERMINAL MATERIAL: Brass

DIMENSIONS = INCHES

CAT. NO.	WIRE RANGE AWG	COLOR CODE	L	D1	D2	BAG QTY	MASTER BAG QTY
I2340	16-14 TO 22-16	BLUE WITH RED RING	1.417	.091	.087	100	1,000
I2341	12-10 TO 16-14	YELLOW WITH BLUE RING	1.614	.134	.091	100	1,000
I2342	8 TO 16-14	RED WITH BLUE RING	1.909	.181	.091	100	1,000
I2343	8 TO 12-10	RED WITH YELLOW RING	1.909	.181	.138	100	1,000

Heat Shrinkable - Butt Splices

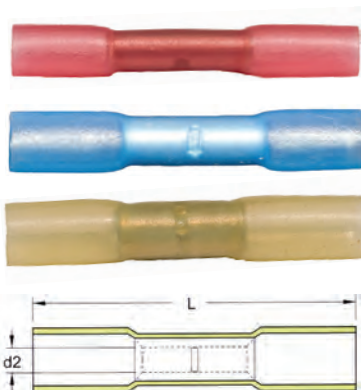

MAXIMUM ELECTRIC CURRENT:

AWG	22	20	18	16	14	12	10
AMP	9	12	17	18	30	35	50

MAXIMUM ELECTRIC RATING: 600 Volts

SHRINK TEMP: 302°F (150°C)

RESISTANT TEMP: 14°F ~ 221°F (-26°C ~ 105°C)


INSULATION MATERIAL: High Density PE Heat Shrink

TERMINAL MATERIAL: Electro Tin Plated Tubular Copper

DIMENSIONS = INCHES

CAT. NO.	COLOR	WIRE SIZE AWG	D2	L	BAG QTY	MASTER BAG QTY
I2331	CLEAR	26-22	.051	1.138	100	1,000
I2332	RED	22-16	.067	1.417	100	1,000
I2334	BLUE	16-14	.091	1.417	100	1,000
I2336	YELLOW	12-10	.134	1.614	100	1,000
I2337	RED	8	.181	1.929	100	-

Heat Shrinkable - Parallel Splice Connector - Solder

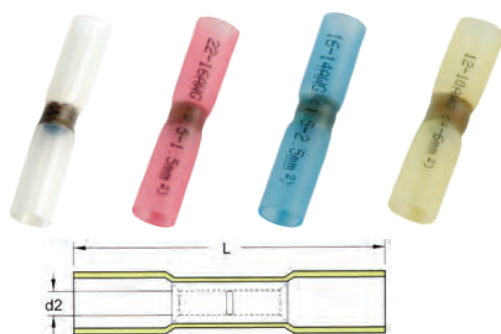

MAXIMUM ELECTRIC CURRENT:

AWG	26	24	22	20	18	16	14	12	10
AMP	5.5	7	9	12	17	18	30	35	50

MAXIMUM ELECTRIC RATING: 600 Volts

SHRINK TEMP: 221°F (105°C)

INSULATION MATERIAL: High Density PE Heat Shrink

TERMINAL MATERIAL: Tubular Tin Solder

Note: This is a Solder (not crimp) termination

DIMENSIONS = INCHES

CAT. NO.	COLOR CODE	WIRE RANGE AWG	L	D1	D	BAG QTY	MASTER BAG QTY
I2345	CLEAR	26-22	.98	.098	.138	100	1,000
I2346	RED	22-16	1.46	.165	.217	100	1,000
I2347	BLUE	16-14	1.46	.185	.252	100	1,000
I2348	YELLOW	12-10	1.65	.236	.315	100	1,000