

# In-line Nylon Cable Ties


- Flat head, low profile design for parallel entry of the tie into the head
- Fixed and flexible two-wedge design provides a low threading force
- Made from UL approved Nylon 6/6
- Temperature Rating: -40°F to 185°F (-40°C to 85°C)
- Flammability Rating: UL 94V-2



DIMENSIONS = INCHES

CAT. NO.	TENSILE STRENGTH (LBS.)	LENGTH	WIDTH	MAX BUNDLE DIA.	COLOR	BAG QTY	MASTER BAG QTY
20378	50	10-1/8	.354	2.91	NATURAL	100	1,000
20379	50	15-1/2	.354	4.61	NATURAL	100	1,000
20380	50	10-1/8	.354	2.91	BLACK	100	1,000
20381	50	15-1/2	.354	4.61	BLACK	100	1,000

# Marker Nylon Cable Ties

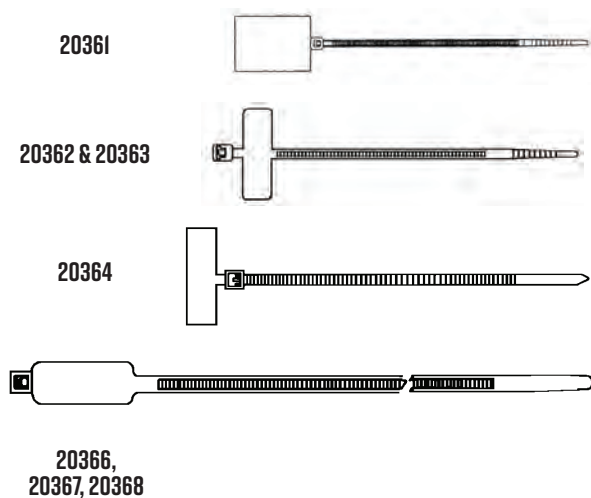

- Identification ties & plates combine the ease of using a cable tie with the permanent identification of your product

DIMENSIONS = INCHES

CAT. NO.	TENSILE STRENGTH (LBS.)	LENGTH	WIDTH	MAX BUNDLE DIA.	MARKER SIZE	BAG QTY	MASTER BAG QTY
20361	18	5-1/8	.098	.98	.79 X 1.10	100	1,000
20362	18	4	.098	.98	.31 X .98	100	1,000
20363	18	7-7/8	.098	1.97	.59 X 1.18	100	1,000
20364	18	4-1/4	.098	.98	.31 X .98	100	1,000
20366	50	7-1/2	.179	1.97	.51 X 1.10	100	1,000
20367	50	10-5/8	.179	2.95	.51 X 1.10	100	1,000
20368	50	14-1/2	.189	4.13	2.15 X .51	100	1,000

