

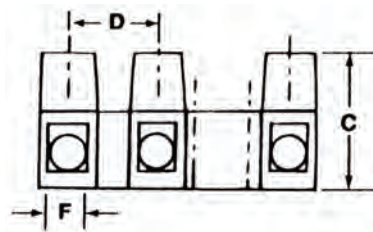


Terminal Blocks

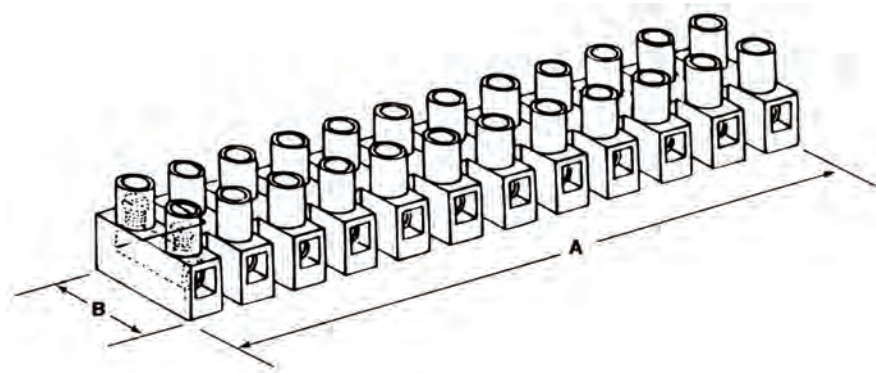

- Touch Proof Recessed Screws and Tubular Contacts provide added safety and helps prevent short circuits
- Tubular Contacts connect stripped, un-terminated solid or stranded wire directly to each contact
- Integrated Stainless Steel Spring Wire Protectors prevent twisting and breakage of stranded wire during termination
- Modular 12-Circuit Design can be cut into smaller sections, or stacked end-to-end
- Dead Front Design to prevent shorts
- Rugged Nylon 66 Housing, UL 94V2
- Brass Metal Alloy, Nickel Plated Terminal Insert
- Zinc Plated, yellow chromated screws
- Can be used for AC & DC Applications
- 300V
- 221°F (105°C)

DIMENSIONS = INCHES

CAT NO.	AMP	VOLTS	WIRE RANGE	A	B	C	D	E	F	STRIP LENGTH	BAG QTY
HEADER CARD - 2 PACK											
22152	20	300	22-12	3.79	.669	.570	.315	.114	.110	.20	2
22154	30	300	22-10 SOL 22-12 STR	4.62	.795	.670	.394	.142	.134	.25	2
22156	30	300	22-10	5.54	.937	.748	.472	.154	.154	.27	2
22158	50	300	20-8	6.22	1.008	.992	.531	.173	.189	.35	2
BULK											
22052	20	300	22-12	3.79	.669	.570	.315	.114	.110	.20	50
22054	30	300	22-10 SOL 22-12 STR	4.62	.795	.670	.394	.142	.134	.25	50
22056	30	300	22-10	5.48	.924	.739	.472	.154	.154	.27	40
22058	50	300	20-8	6.22	1.008	.992	.531	.173	.189	.35	25