


Beam Clamps Universal



- Used with Conduit Hangers, Bridle Rings and Threaded Rod
- Tapped for Rods - bottom and back
- Case Hardened Steel Set Screw tapped at an angle - locks on beam
- Zinc Plated Steel

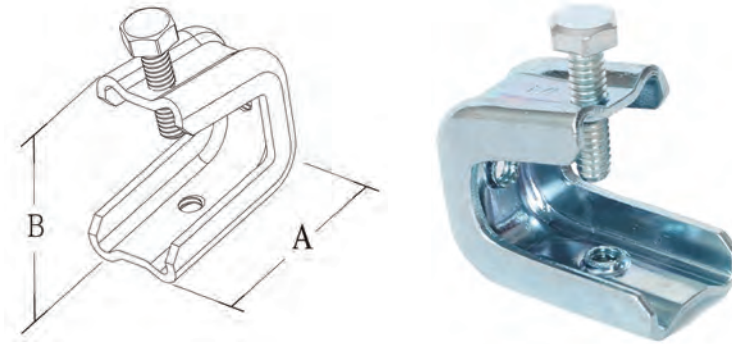



DIMENSIONS = INCHES

CAT. NO.	FITS FLANGE	BOTTOM & BACK THREADS	STATIC LOAD LIMIT BOTTOM HOLE ONLY	SCREW DIMENSIONS	A	B	INNER BOX	MASTER BOX
17468	1/2	1/4-20	75 LBS	1/4-20 X 1"	1.69	1.66	25	250
18111*	1/2	10-24	75 LBS	1/4-20 X 1"	1.65	1.40	-	50
17469	3/4	3/8-16	200 LBS	5/16-18 X 1-3/8"	2.15	2.01	-	50

*Not UL Listed

Malleable Iron Universal Beam Clamp

- Maximum Flange Thickness of 5/8"
- The threaded hole on the back side of the clamp is not load rated
- Zinc Electroplate Finish

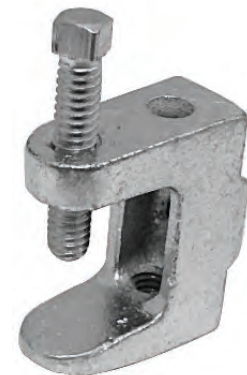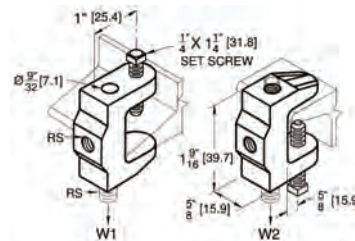

CAT. NO.	ROD SIZE (RS)	MAX LOAD (W1)	MAX LOAD (W2)	BOX QTY
17486	1/4"-20	100 LBS.	250 LBS.	100

Malleable Iron Rod Support Beam Clamp



- Used with Conduit Hangers, Bridle Rings & Drop Rods. 1/4" to 1/2"
- Tapped for Rods - bottom and back on all sizes
- Malleable Iron - Zinc plated

DIMENSIONS = INCHES

CAT. NO.	JAW OPENING	ROD SIZE (RS)	SET SCREW SIZE	MAX LOAD (W)	B	L	H	BOX QTY
17472	3/4"	1/4"-20	5/16"-18	125 LBS.	1.18"	1.38"	1.38"	50
17474	7/8"	3/8"-16	1/2"-13	300 LBS.	2.00"	1.87"	1.75"	50
17476	1-1/8"	1/2"-13	1/2"-13	750 LBS.	2.50"	2.37"	2.14"	25

