





Beam Clamp to Conduit Hanger Assembly

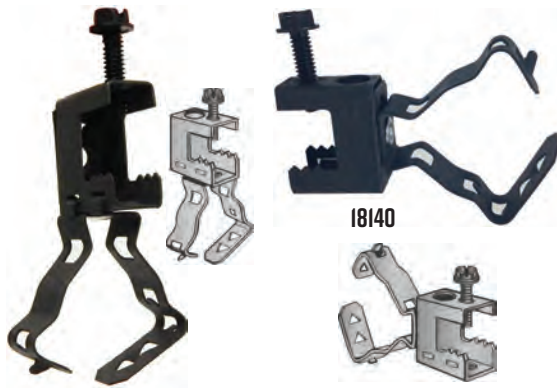

- Spring Steel Beam Clamp with Pre-Installed Conduit Hanger
- Positive Locking Conduit Hanger

Static Load limit:
100 lbs Vertical
25 lbs Horizontal

DIMENSIONS = INCHES


CAT. NO.	ORIENTATION	FITS CONDUIT	BOX QTY
18130	BOTTOM MOUNT	1/2 & 3/4	100
18140	SIDE MOUNT	1/2 & 3/4	100

Flange Mount Strap Hangers



18270-18271

18275-18276



- Suspends Strapping Thru 1" Width
- Fits Beam Flanges from 1/8" to 3/4"
- Parallel & Right Angle Configurations
- Installs with hammer only

Static Load limit: 200 lbs

DIMENSIONS = INCHES

CAT. NO.	FLANGE THICKNESS	TYPE	BOX QTY
18270	1/8 TO 1/4	RIGHT ANGLE	100
18271	5/16 TO 1/2	RIGHT ANGLE	100
18275	1/8 TO 1/4	PARALLEL	100
18276	5/16 TO 1/2	PARALLEL	100

Threaded Rod to Beam Assembly



- Suspends 1/4" and 3/8" threaded rod from overhead mountings
- Fits 1/8" Thru 1/2" Thick Flanges

Static Load limit: 200 lbs

DIMENSIONS = INCHES

CAT. NO.	FLANGE THICKNESS	FOR USE WITH	BOX QTY
18250	1/8 TO 1/4	1/4" THREADED ROD	100
18251	5/16 TO 1/2	1/4" THREADED ROD	100
18255	1/8 TO 1/4	3/8" THREADED ROD	100
18256	5/16 TO 1/2	3/8" THREADED ROD	100